


## Roof Rear Spoiler Replacement


### Removal Procedure

**Note:** It is only necessary to lower the headlining. Only do those steps in the headlining procedure that will allow access to the component being removed.

1. Lower the rear of the headlining trim panel. [Headlining Trim Panel Replacement](#)

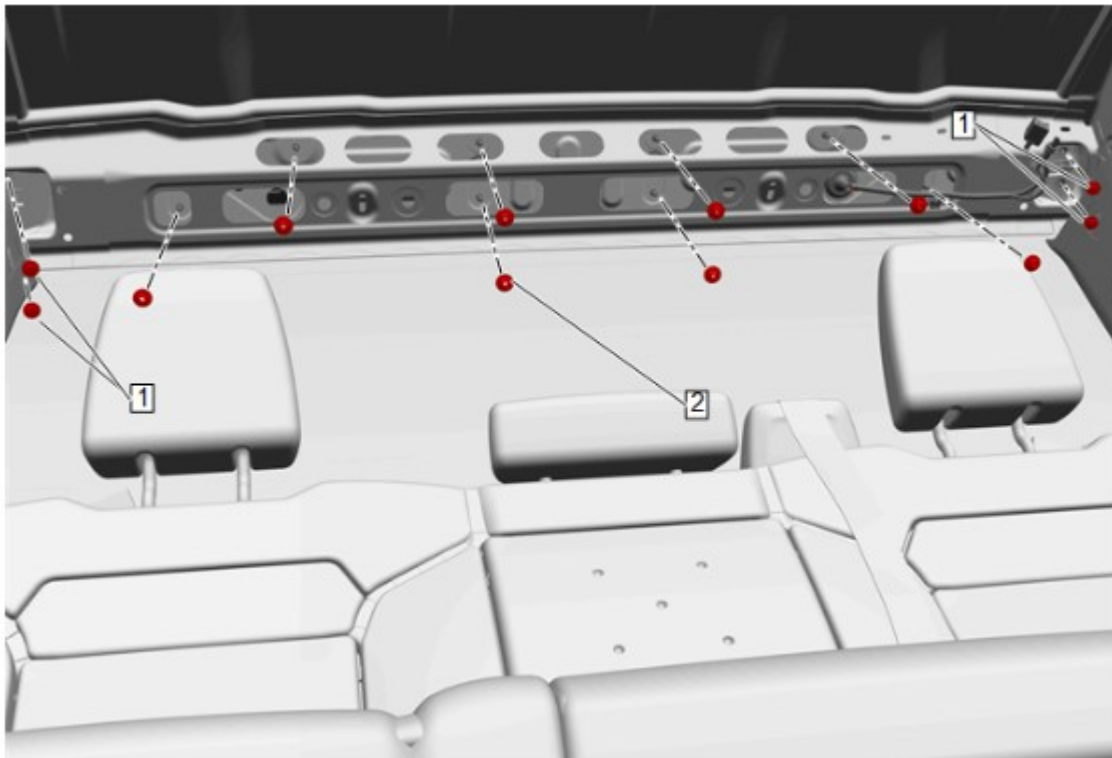


2. Roof Rear Spoiler Bolt (1) » Remove [4x]
3. Roof Rear Spoiler Nut (2) » Remove [8x]
4. Disconnect all electrical connectors.

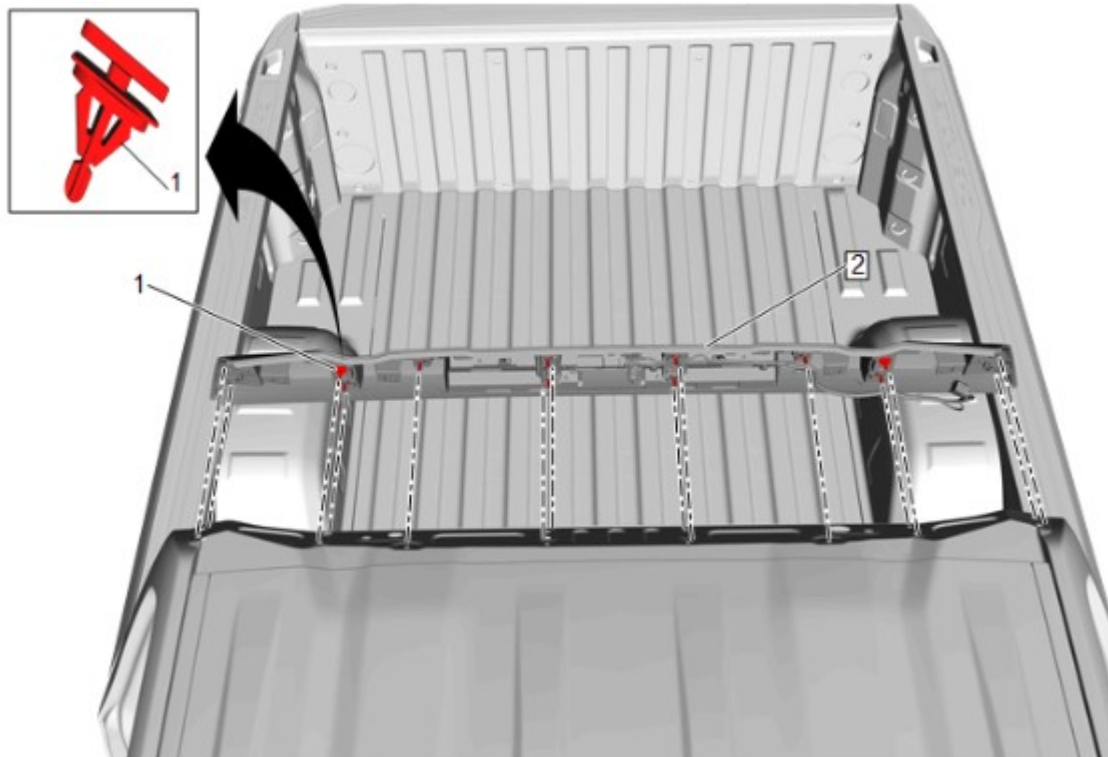

5. Roof Rear Spoiler Retainer (1) » Release [2x]


6. Roof Rear Spoiler (2) » Remove

### Installation Procedure

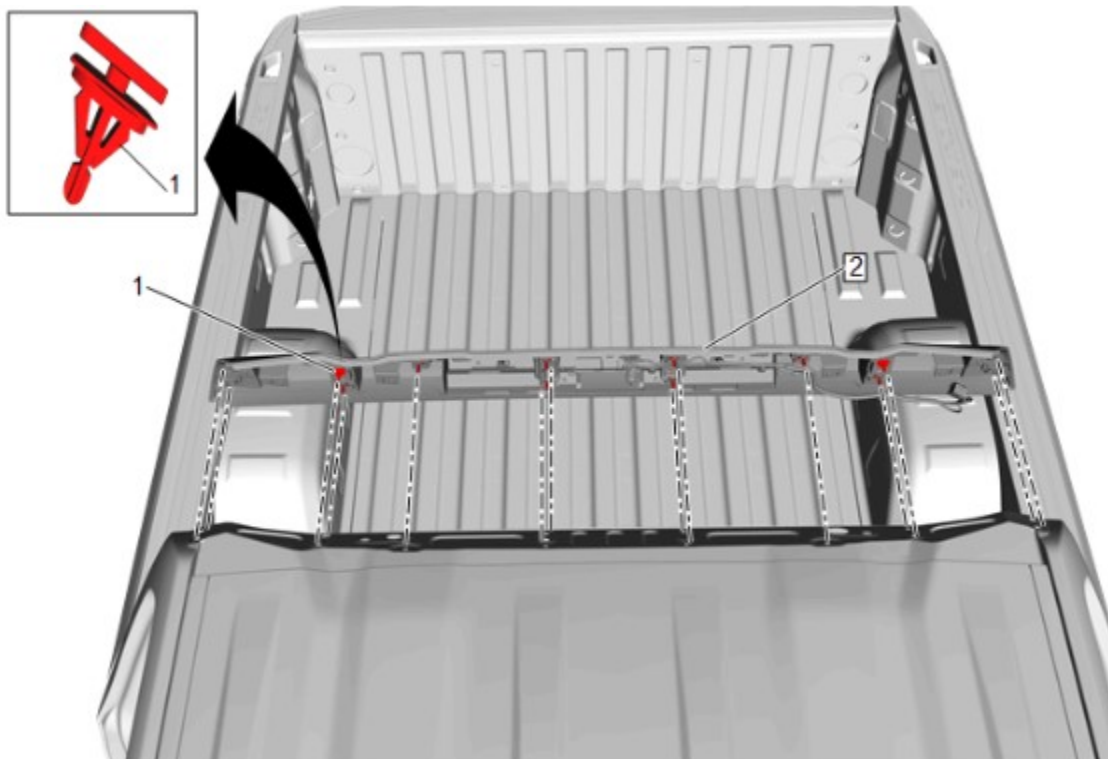

1. Roof Rear Spoiler (2) » Install

2. Seat the roof rear spoiler retainers (1) [2x]
3. Connect the electrical connectors.

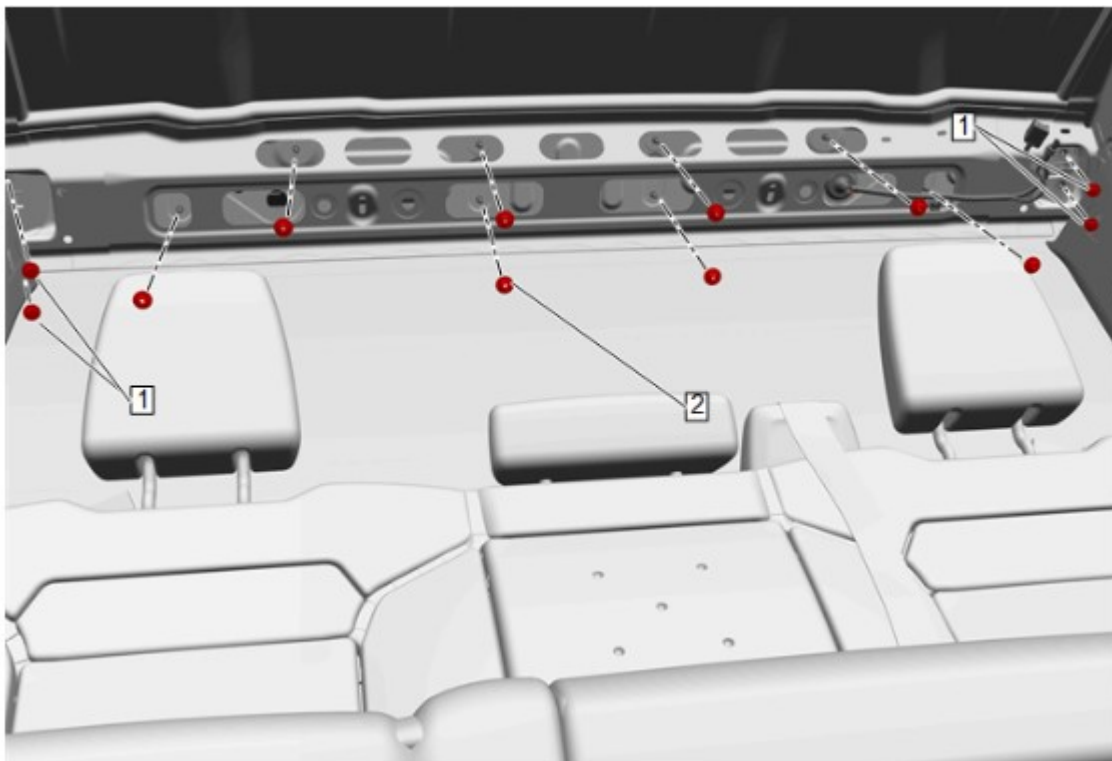

**Caution:** Refer to [Fastener Caution](#).

4. Roof Rear Spoiler Bolt (1) » Install and tighten [4x] **6 N•m (53 lb in)**
5. Roof Rear Spoiler Nut (2) » Install and tighten [8x] **6 N•m (53 lb in)**
6. Headlining Trim Panel » Install — [Headlining Trim Panel Replacement](#)