

Fastener Specifications

Table 1: [Front Lower Control Arm](#)

Table 2: [Front Shock Absorber](#)

Table 3: [Front Stabilizer Shaft](#)

Table 4: [Front Stabilizer Shaft Link](#)

Table 5: [Front Torsion Bar Support Bracket](#)


Table 6: [Front Upper Control Arm](#)

Table 7: [Front Wheel Hub \(RWL\)](#)

Table 8: [Front Wheel Hub \(F48\)](#)

Table 9: [Front Wheel Hub Extension](#)


© 2024 General Motors. All rights reserved.

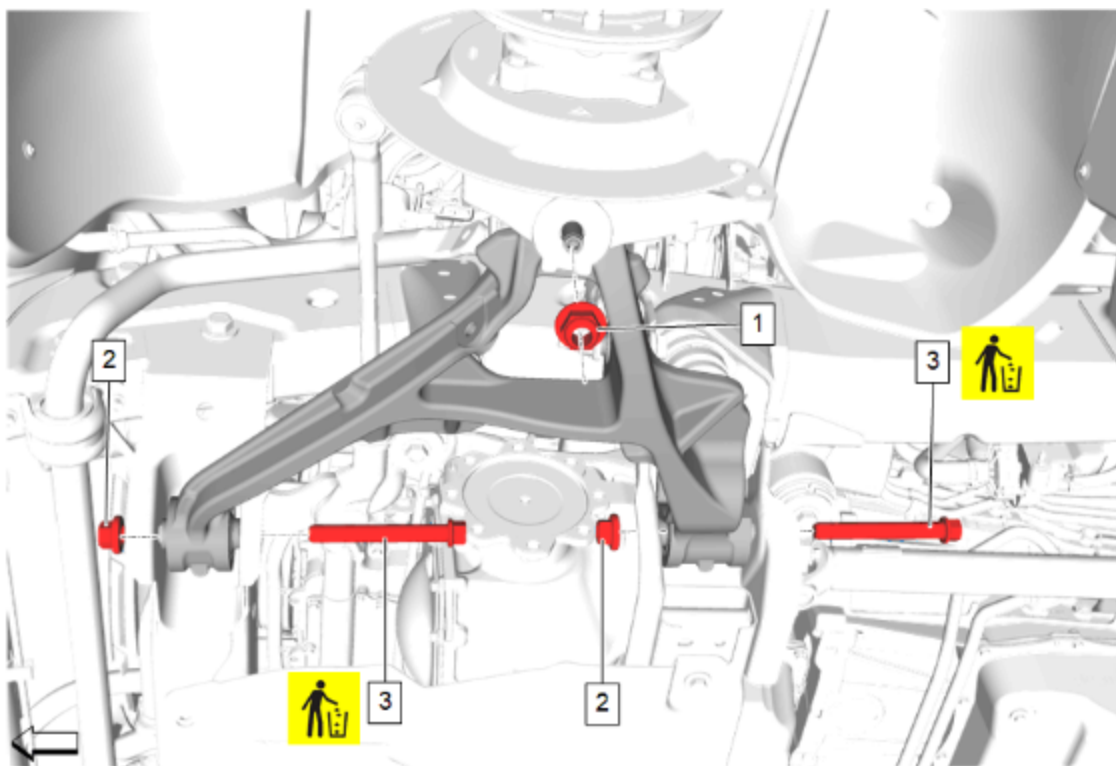

Front Lower Control Arm

Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Lower Control Arm Ball Stud Nut	—	—	First Pass: 50 Y (37 lb ft) Final Pass: 90 - 100 degrees	Front Lower Control Arm Replacement
2	Front Lower Control Arm Nut [2x]	—	—	First Pass: 180 Y (133 lb ft) Final Pass: 45 - 75 degrees	Front Lower Control Arm Replacement
3	Front Lower Control Arm Bolt [2x]	Yes	—	—	Front Lower Control Arm Replacement


© 2024 General Motors. All rights reserved.

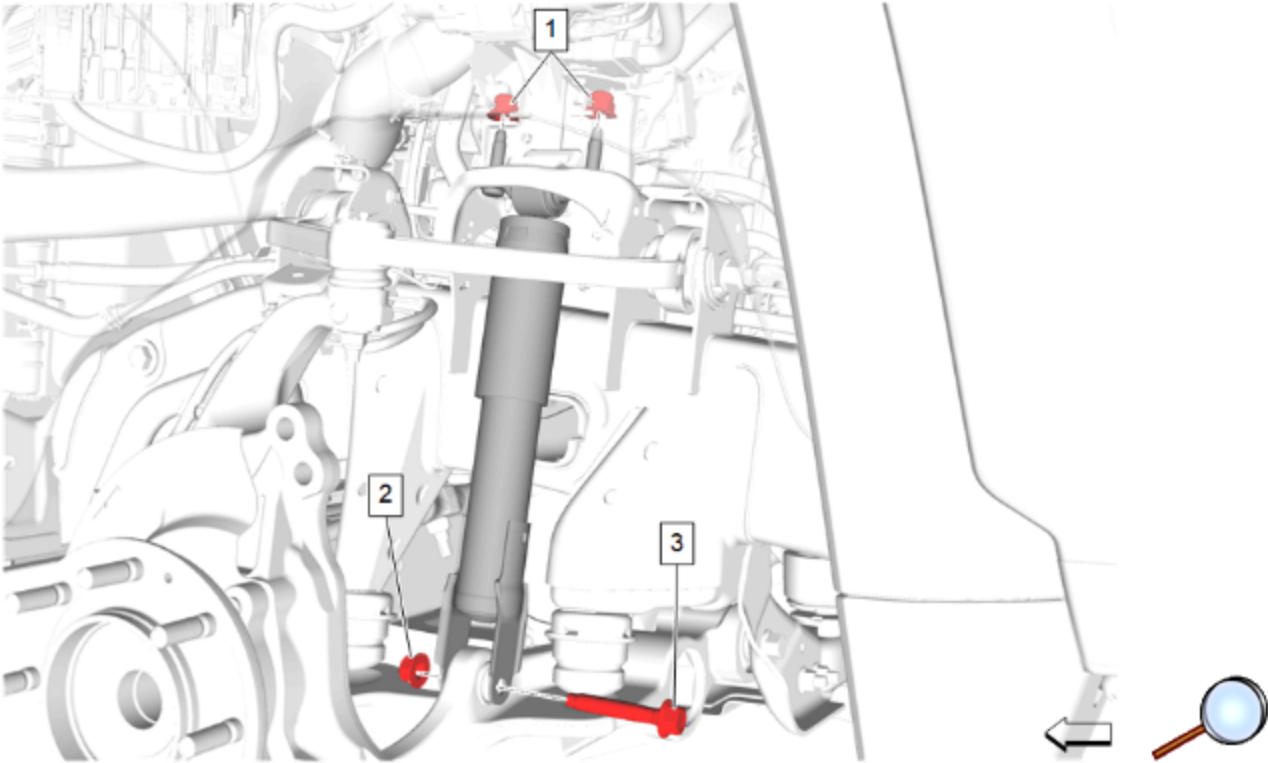

Front Shock Absorber


Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Shock Absorber Nut [2x]	—	—	65 Y (48 lb ft)	Front Shock Absorber Replacement
2	Front Shock Absorber Nut	—	—	—	Front Shock Absorber Replacement
3	Front Shock Absorber Bolt	—	—	160 Y (118 lb ft)	Front Shock Absorber Replacement

© 2024 General Motors. All rights reserved.

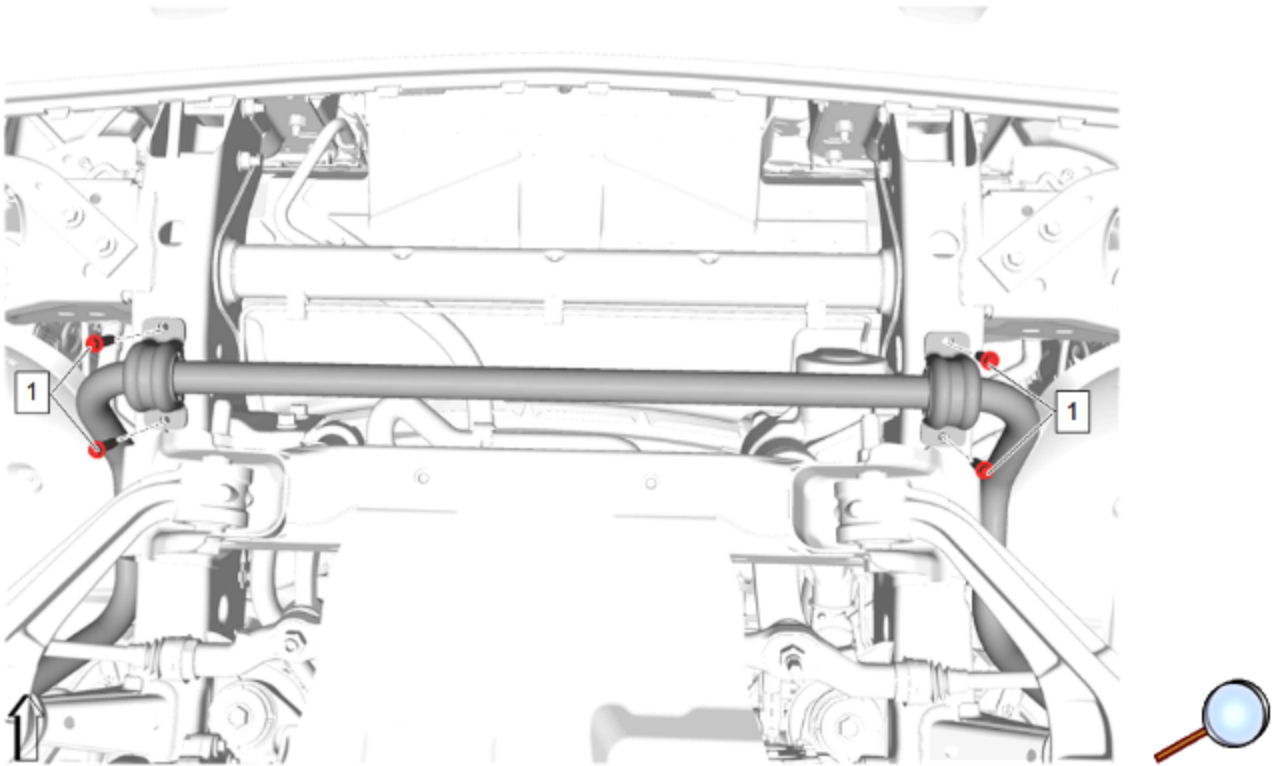

Front Stabilizer Shaft


Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Stabilizer Shaft Bolt [4x]	—	—	50 Y (37 lb ft)	Front Stabilizer Shaft Replacement

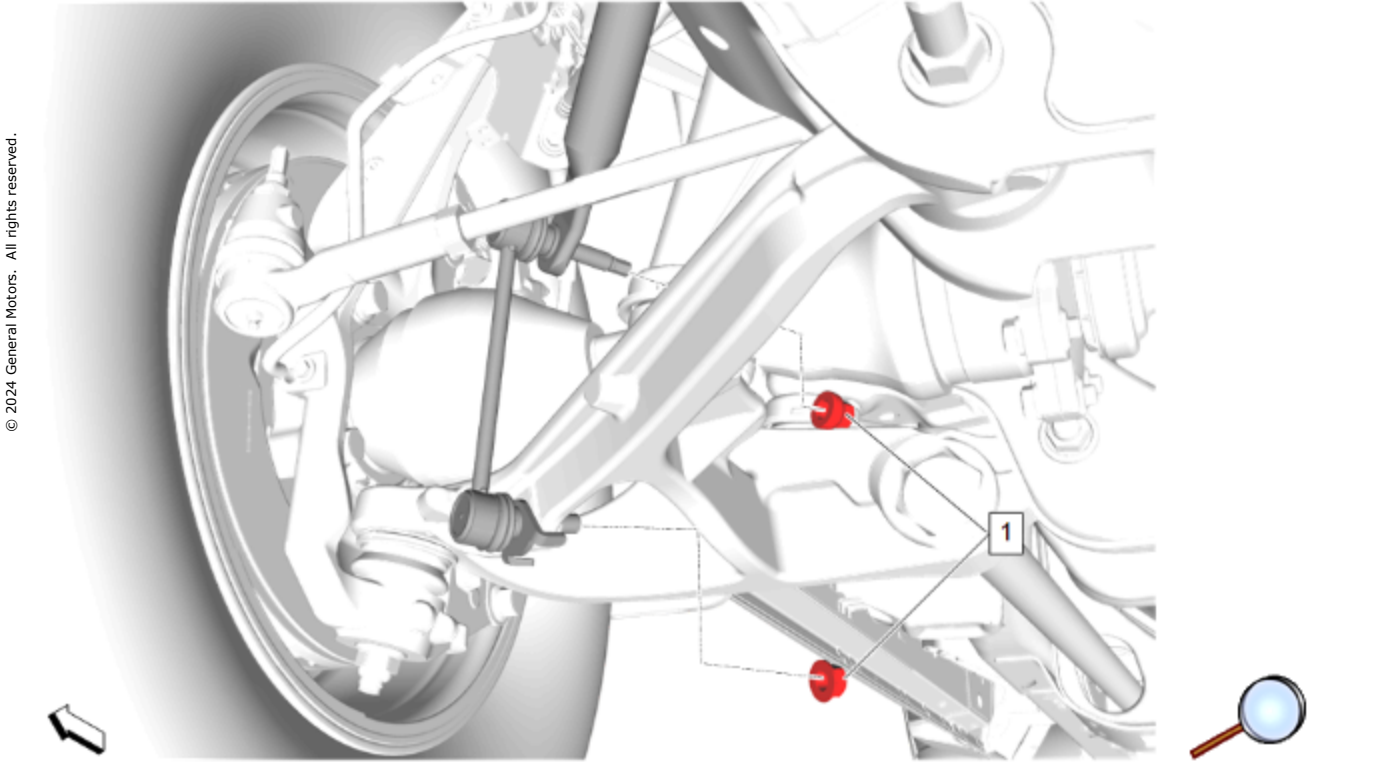

Front Stabilizer Shaft Link


Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Stabilizer Shaft Link	—	—	100 Y (74 lb ft)	Front Stabilizer Shaft Link

Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
	Nut [2x]				Replacement

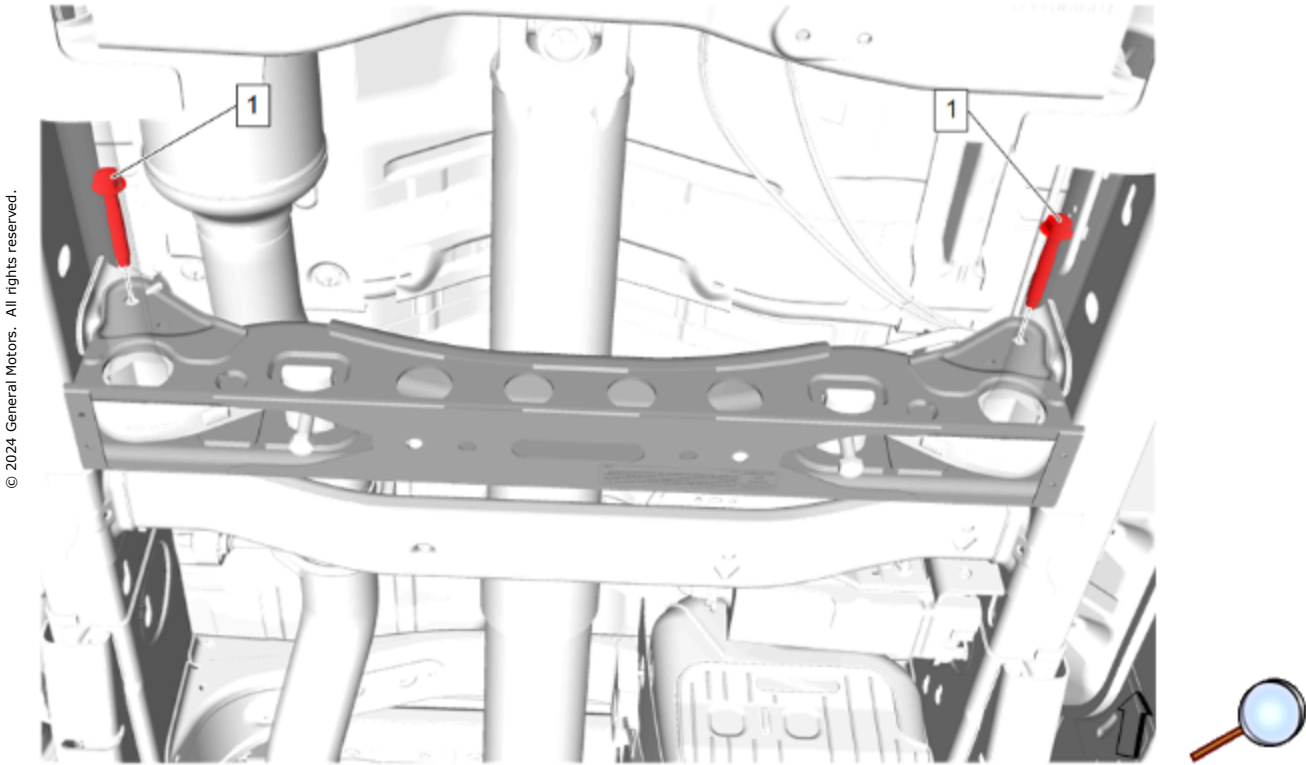


Front Torsion Bar Support Bracket

Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Torsion Bar Support Bolt [2x]	—	—	125 Y (92 lb ft)	Torsion Bar Support Replacement

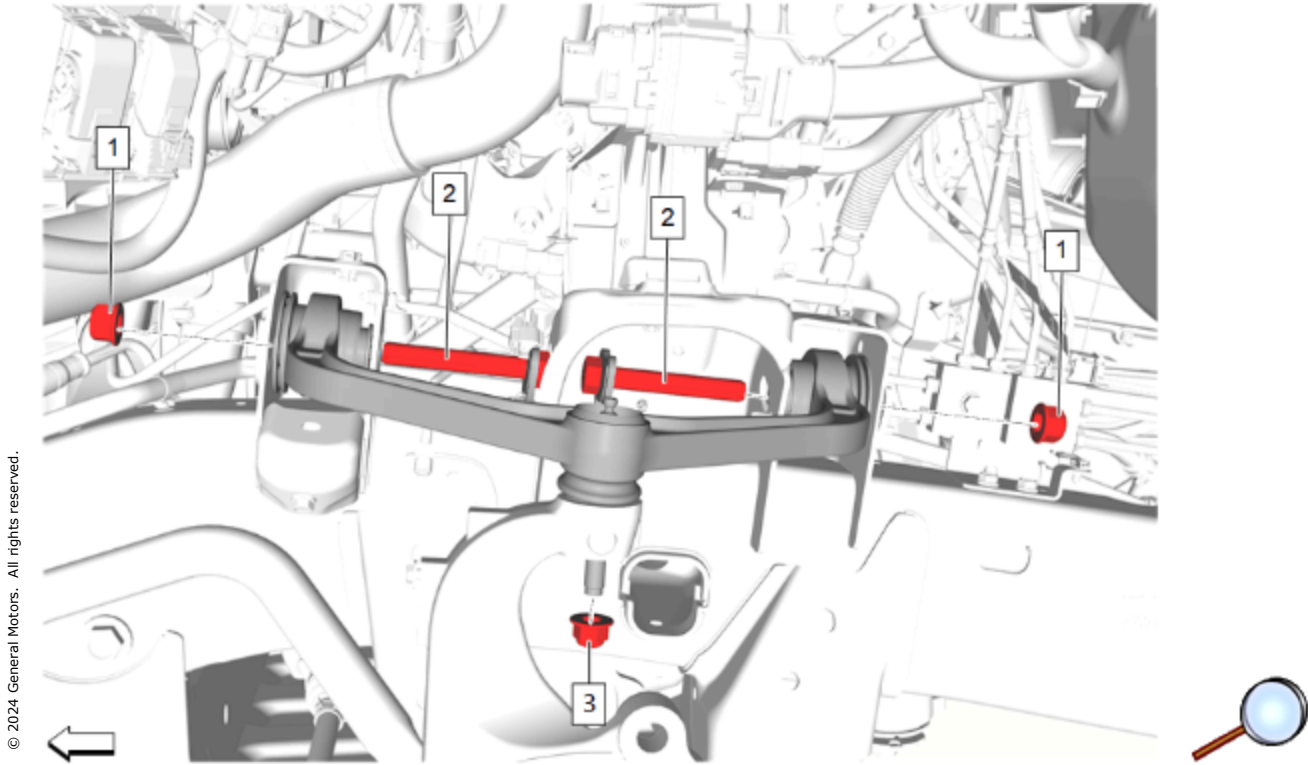


Front Upper Control Arm

Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Upper Control Arm Nut [2x]	—	—	Torque to be applied during alignment.	Front Caster and Camber Adjustment
2	Front Upper Control Arm Bolt [2x]	—	—	—	Front Upper Control Arm Replacement
3	Front Upper Control Arm Ball Stud Nut	—	—	First Pass: 50 Y (37 lb ft) Final Pass: 90–110 Degrees	Front Upper Control Arm Replacement

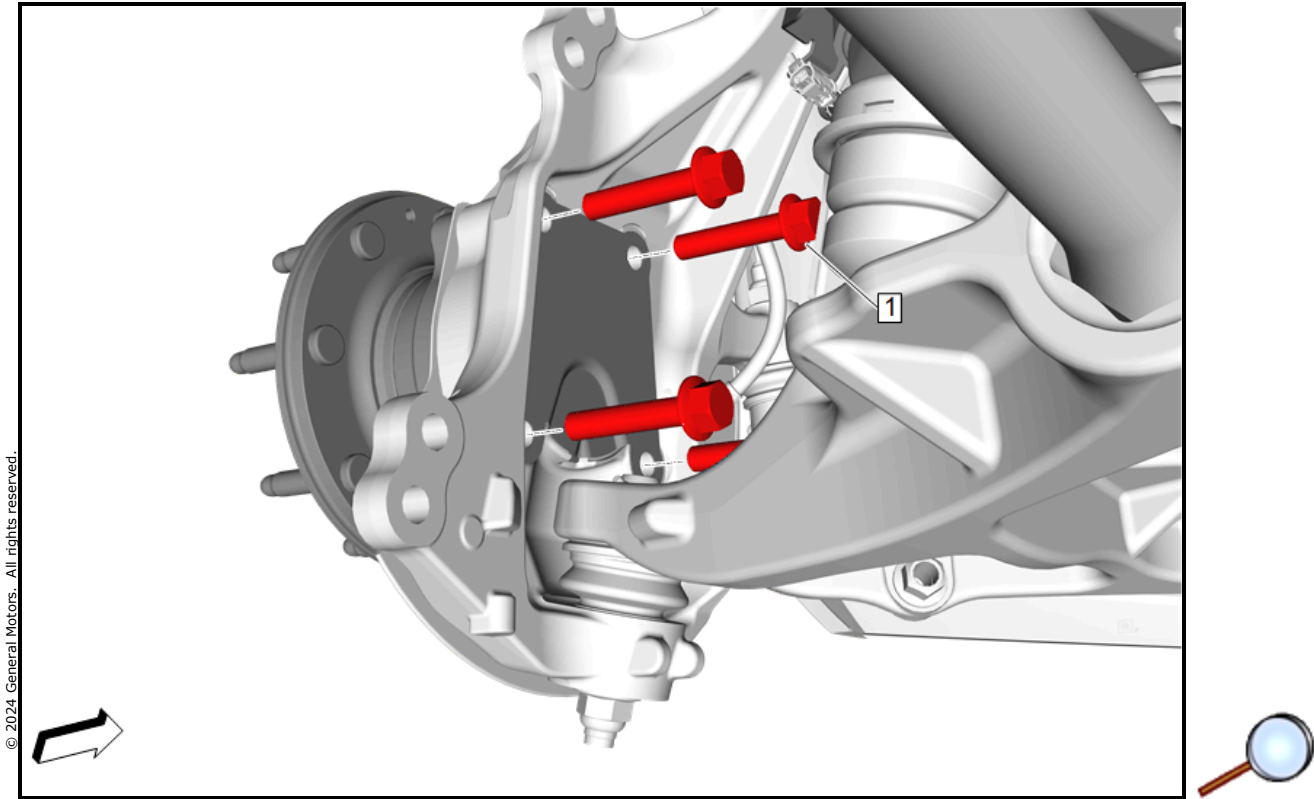


Front Wheel Hub (RWL)

Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Wheel Hub Bolt [4x]	—	—	180 Y (133 lb ft)	Front Wheel Bearing and Hub Replacement

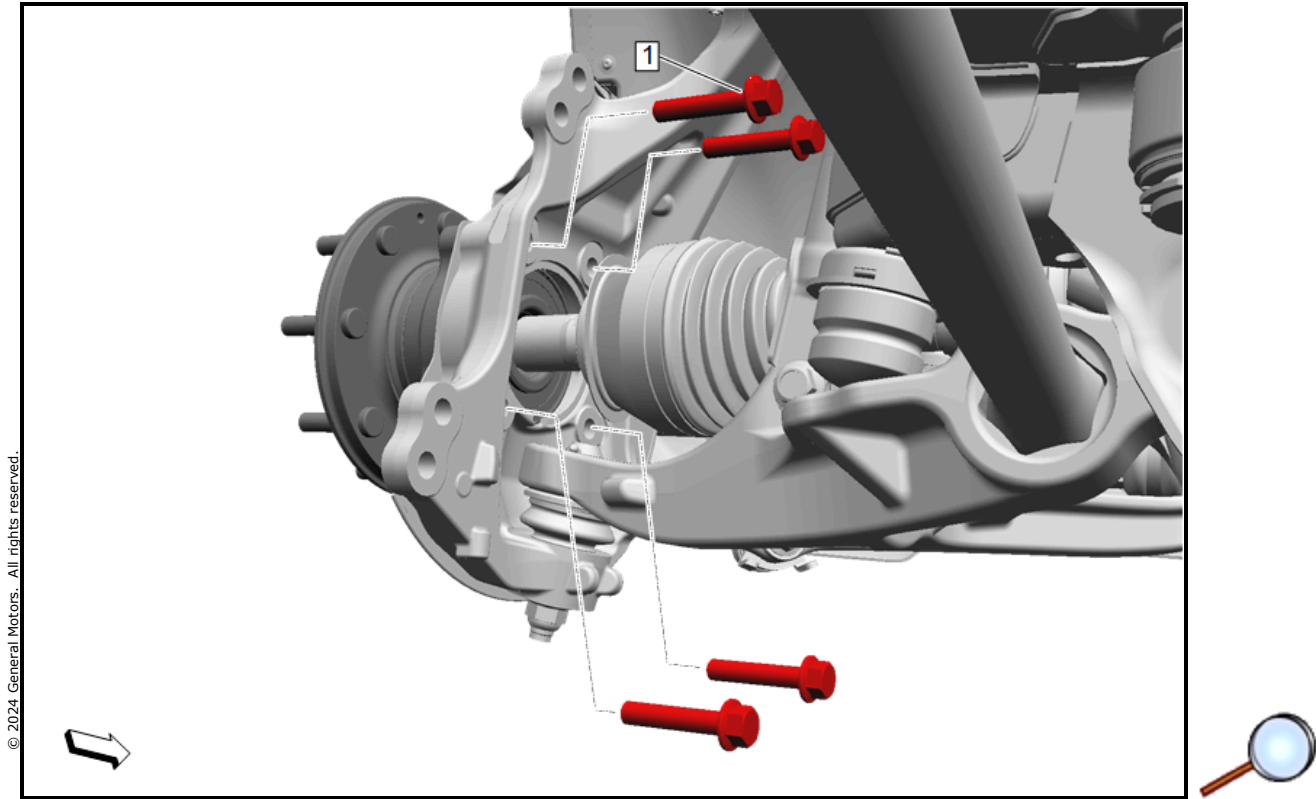

Front Wheel Hub (F48)

Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Wheel Hub Bolt [4x]	—	—	180 Y (133 lb ft)	Front Wheel Bearing and Hub Replacement

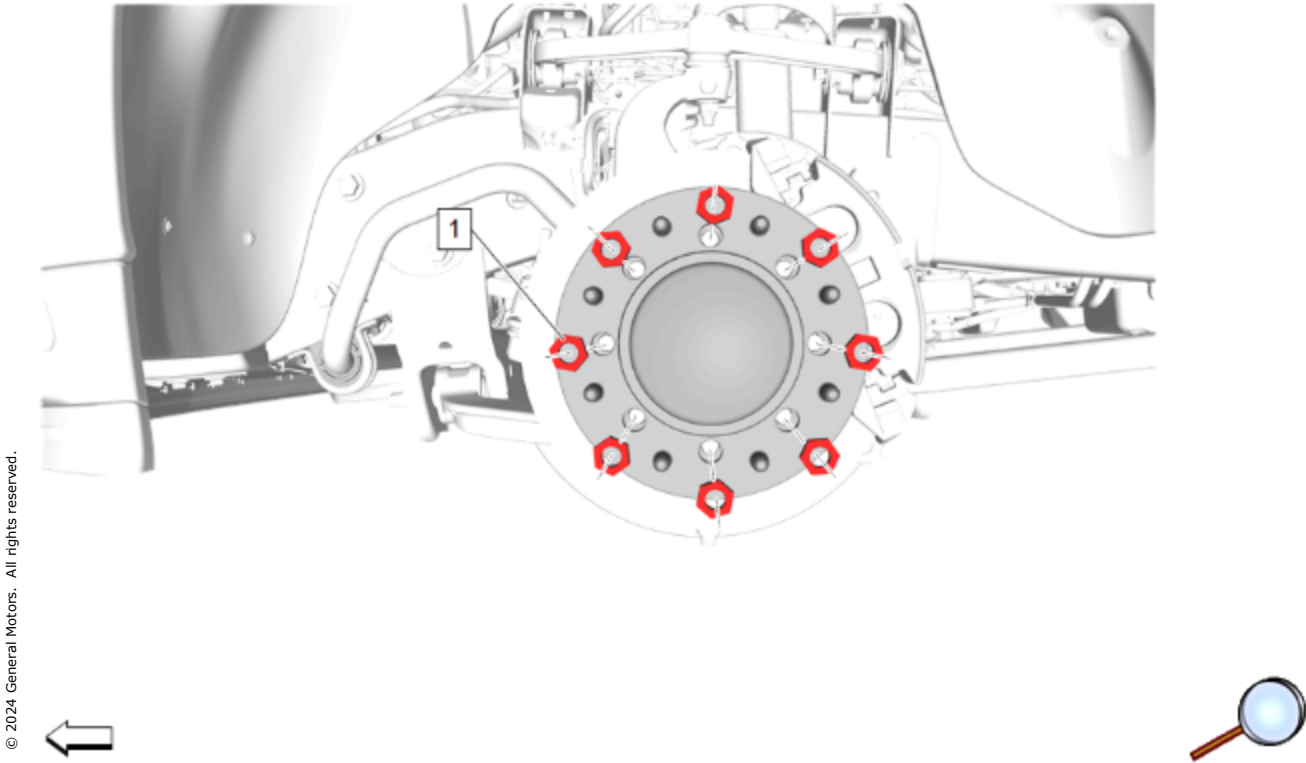

Front Wheel Hub Extension

Callout	Component Name [Component Quantity]	Single Use Fastener/Component	Thread Locking Adhesive Required	Specification	Procedure
				Metric (English)	
1	Front Wheel Hub Extension Nut [8x]	—	—	130 Y (96 lb ft)	Front Wheel Hub Extension Replacement