

<- Back


Forward ->

Document ID# 831989
2002 Chevrolet Chevy K Silverado - 4WD

Print

Cupholder Replacement Pro

[Removal Procedure](#)

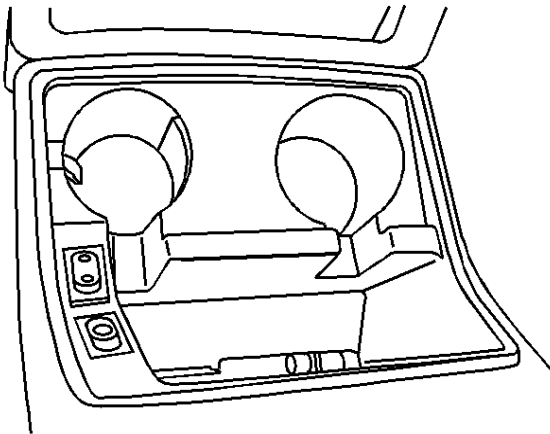

1. Insert a flat bladed tool between the cupholder and console in order to pry the cupholder assembly out.
2. Lift the cupholder assembly slightly in order to disconnect the electrical connectors.
3. Remove the cupholder from the console.
4. Remove the switches from the cupholder assembly. Refer to [Switch Replacement - Hot and Cold Cupholder](#) .
5. Remove the screws retaining the beverage-mate to the cupholder.
6. Remove the beverage-mate.


[Installation Procedure](#)

1. Install the beverage-mate to the cupholder.
2. Install the retaining screws.

Tighten

Tighten the retaining screws to 1.6 N·m (14 lb in).

3. Install the switches to the cupholder assembly. Refer to [Switch Replacement - Hot and Cold Cupholder](#)

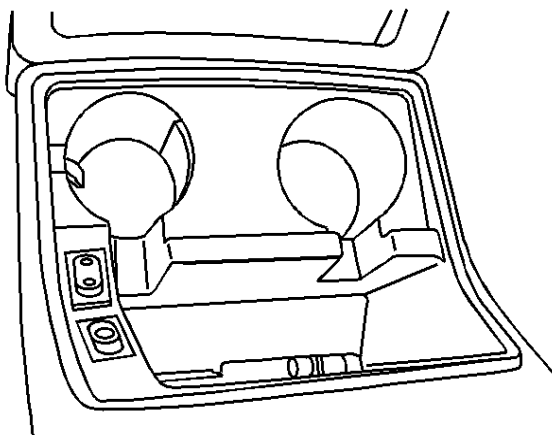

4. Connect the wire connectors to the switches.
5. Install the cupholder assembly to the console by pressing downwards until fully seated.

[<- Back](#)[Forward ->](#)

Document ID# 831989
2002 Chevrolet Chevy K Silverado - 4WD

[Print](#)