



Stop Lamp Switch Replacement

Removal Procedure

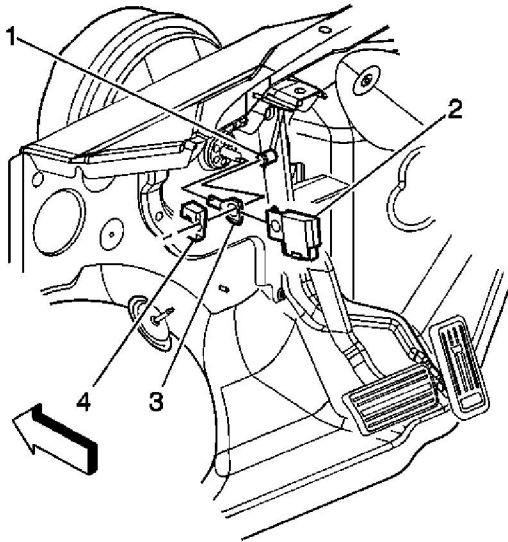

1. Disconnect the electrical connector from the stop lamp switch (2).
2. Remove the pushrod retaining clip (4).
3. Remove the stop lamp switch (2).

Installation Procedure

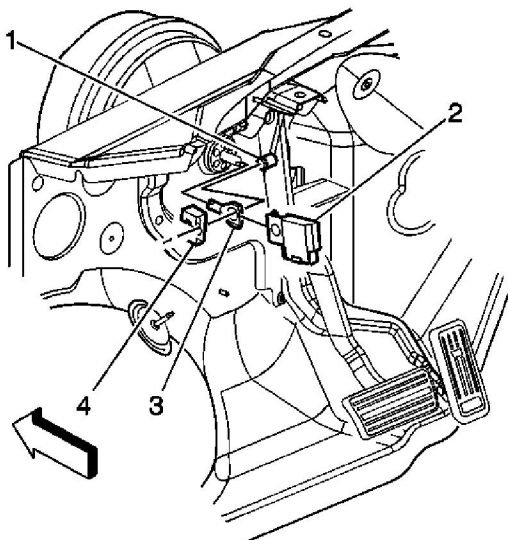

© 2014 General Motors Corporation. All rights reserved.



1. Install the stop lamp switch (2).
2. Install the pushrod retaining clip (4).
3. Connect the electrical connector to the stop lamp switch (2).