


Front Side Door Lock Replacement

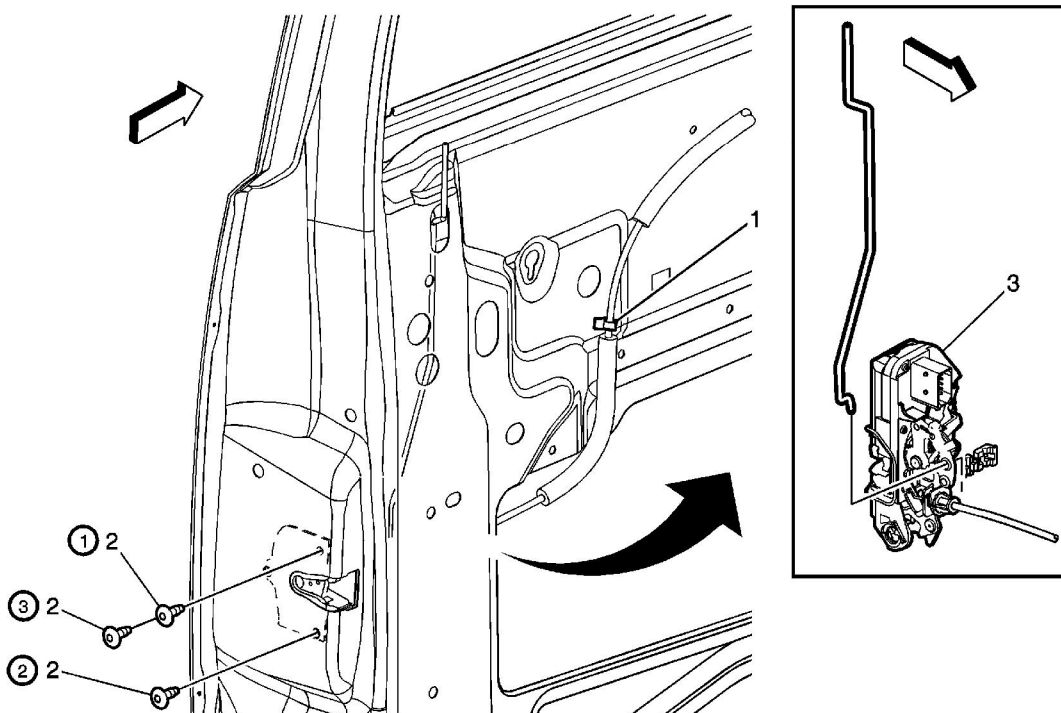

Callout	Component Name
Preliminary Procedures 1. Position the door window as needed for service. 2. Remove the door trim panel. Refer to Front Side Door Trim Panel Replacement. 3. Remove the water deflector. Refer to Front Side Door Water Deflector Replacement.	
1	Inside Door Handle Cable Retainer Clip
2	Front Side Door Lock Screw (Qty: 3) Notice: Refer to Fastener Notice in the Preface section. Tip 1. Release the door lock cylinder rod. 2. Release the outside door handle rod from the door lock clip. 3. The mandatory sequence is 3, 1, 2. Tighten 10 N·m (89 lb in)
	Front Side Door Lock

3

Tip

1. Disconnect the electrical plug.
2. Transfer all parts to the new lock.