


Front Side Door Water Deflector Replacement

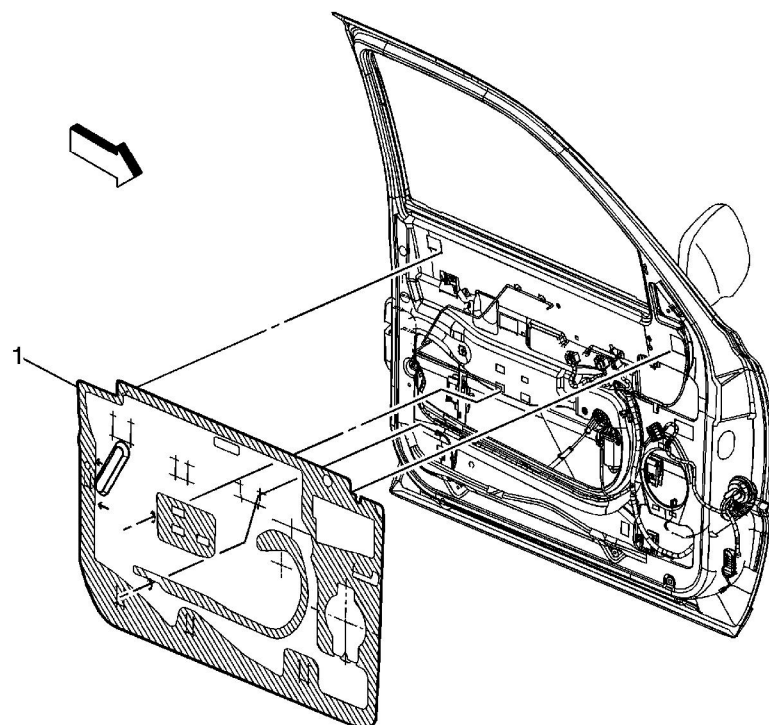

Callout	Component Name
Preliminary Procedure	
Remove the door trim panel. Refer to Front Side Door Trim Panel Replacement .	
1	Front Side Door Water Deflector Tip 1. Use a flat-bladed tool to separate the bond between the sealer and the door. 2. Use waterproof tape, or 3M 777 or equivalent, if the water deflector is damaged. 3. It will be necessary to replace trim panel retaining clips, if broken. 4. Before replacing the water deflector clean the door adhesive area, using a 50/50 mix of isopropyl alcohol or equivalent.