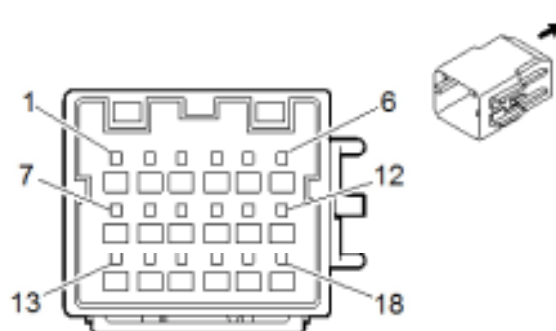
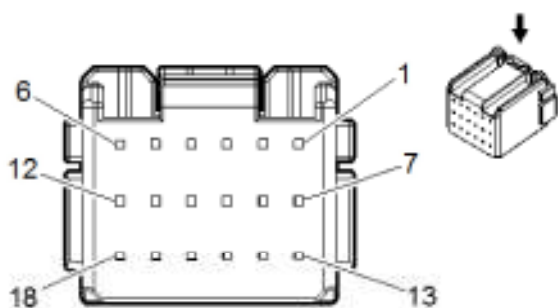


X510 Outside Rearview Mirror to Driver Door Harness**Connector Part Information**

- Harness Type:
- OEM Connector: ARVPB-18-3AK
- Service Connector: Service by Harness – See Part Catalog
- Description: 18 F 0.64 Series (BK)

**Connector Part Information**

- Harness Type: Driver Door
- OEM Connector: 13888973
- Service Connector: Service by Harness - See Part Catalog
- Description: 18-Way M 0.64 Series (BK)

Terminal Part Information

Terminal Type ID	Terminated Lead	Diagnostic Test Probe	Terminal Removal Tool	Service Terminal	Tray	Core Crimp	Insulation Crimp
I	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available
II	Not Available	J-35616-65B (L-BU)	J-38125-553	SNAC3W-A021T-0.64	20	J	J

X510 Outside Rearview Mirror to Driver Door Harness

Pin	Size	Color	Circuit	Terminal Type ID	Option	Function	Pin	Size	Color	Circuit	Terminal Type ID	Option
1	0.35	OG/WH	5996	I	-	Driver Outside Rear View Mirror Puddle Lamp Supply Voltage	1	0.5 0.5	GY/WH VT/GY	5996 709	II	-
2	0.35	GN/BK	1690	I	-	Automatic Day/Night Mirror Signal	2	0.35 0.5	YE/BK WH/VT	1690 1430	II	-
3	0.35	BU	3393	I	-	Driver Mirror Position Sensor Low Reference	3	0.35	BK/BN	3393	II	-
4	0.35	YE	3411	I	-	Driver Mirror Motor Fold Out Control	4	0.5	GY/WH	3411	II	-
5	0.35	BK/WH	1150	I	-	Ground	5	0.5	BK	1150	II	-
6	-	-	-	-	-	Not Occupied	6	-	-	-	-	-
7	0.35	GY	3395	I	-	Driver Mirror Position Sensor Left (-) Right (+) Signal	7	0.35	WH/YE	3395	II	-
8	0.35	BK	2267	I	-	Mirror Heating Element Supply Voltage	8	0.5	BN/OG	2267	II	-
9	0.35	BU/WH	3390	I	-	Driver Mirror Motor Up (+) Down (-) Control	9	0.35 0.5	VT/D-BU VT/D-BU	3390 3390	II	-

© 2014 General Motors. All rights reserved.

Pin	Size	Color	Circuit	Terminal Type ID	Option	Function	Pin	Size	Color	Circuit	Terminal Type ID	Option
10	0.35	GN/WH	3389	I	-	Driver Mirror Motor Right (+) Left (-) Control	10	0.35 0.5	BN/BK BN/BK	3389 3389	II	-
11	0.35	BK	1150	I	-	Ground	11	0.5	BK	1150	II	-
12	0.35	WH	3391	I	-	Driver Mirror Motor Common Control	12	0.35 0.5	YE/BN YE/BN	3391 3391	II	-
13	0.35	RD/BU	1314	I	-	Left Front Turn Signal Lamp Supply Voltage	13	0.5	D- BU/WH	1314	II	-
14	0.35	GN	3394	I	-	Driver Mirror Position Sensor Up (+) Down (-) Signal	14	0.35	GY/BN	3394	II	-
15	-	-	-	-	-	Not Occupied	15	-	-	-	-	-
16	0.35	PK	1691	I	-	Automatic Day/Night Mirror Low Reference	16	0.35	BK/YE	1691	II	-
17	0.35	BN	3392	I	-	Driver Mirror Position Sensor High Reference	17	0.35	VT/RD	3392	II	-
18	0.35	L-BU	3412	I	-	Driver Mirror Motor Fold In Control	18	0.5	WH/L- GN	3412	II	-